


# TOTAL JOINERY SUPPLIES

CUSTOM BUILT RESIDENTIAL AND COMMERCIAL JOINERY


ADD: 1/71 NORTHGATE DRIVE THOMASTOWN  
 PH: (03) 94645111 FAX: (03) 9464 5145  
 EMAIL: TOTALDESIGN1@BIGPOND.COM  
 WEB: WWW.TOTALJOINERYSUPPLIES.COM.AU

## ULTRAMATT VANITIES


### AVAILABLE SIZES (ISOMETRIC VIEW):

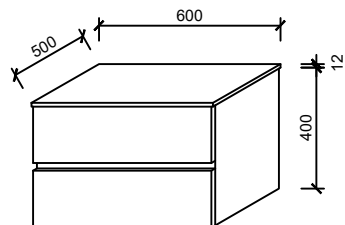


2DR600

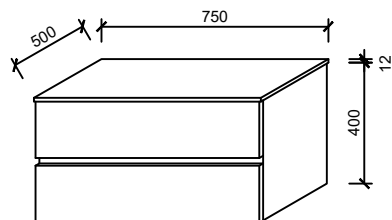


2DR750

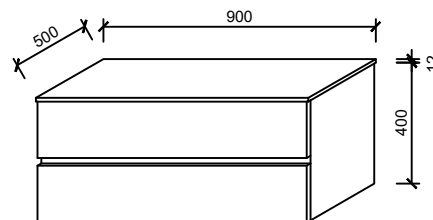


2DR900

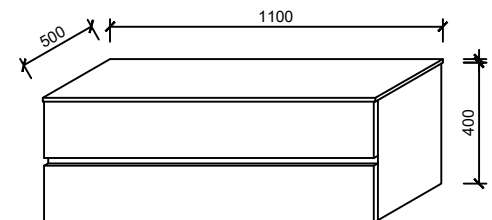


2DR1100

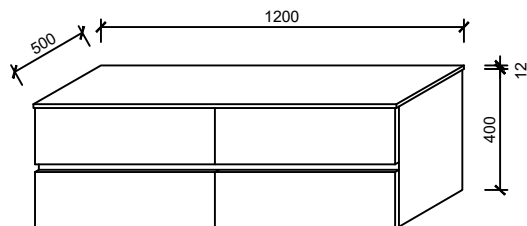

2x2DR600

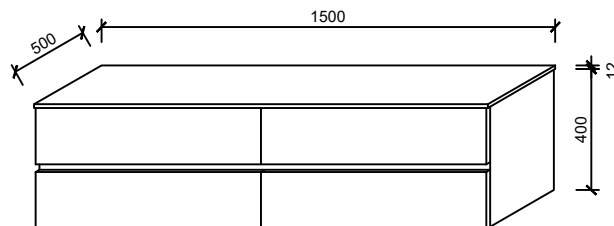

2x2DR750

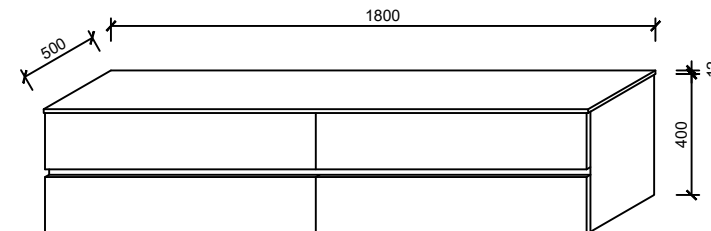

2x2DR900

### AVAILABLE SIZES (TEXT):

2DR600	= 600MM OVERALL
2DR750	= 750MM OVERALL
2DR900	= 900MM OVERALL
2DR1100	= 1100MM OVERALL
2x2DR600	= 1200MM OVERALL
2x2DR750	= 1500MM OVERALL
2x2DR900	= 1800MM OVERALL

### SPECIFICATION:

CARCASS (W): 16MM WHITE MELAMINE  
 CARCASS (B): 16MM BLACK MELAMINE  
 DRAWER FACES: 18MM ULTRAMATT  
 BENCHTOP (12): 12MM CORIAN  
 BENCHTOP (20): 20MM STONE / TIMBER  
 HARDWARE: BLUM ANTARO  
 HANDLES: SQUARE FINGERPULL

### INSTALLATION INSTRUCTIONS:

INSTALLATION MUST BE PERFORMED BY QUALIFIED PERSONNEL. ENSURE UNIT DOES NOT BUTT INTO WET AREAS, LEAVE MINIMUM 100MM. ENSURE UNIT IS NOT EXPOSED TO SHOWER SPRAY. ENSURE ROOM IS ADEQUATELY VENTILATED. CONSIDER DIRECT SUNLIGHT (THIS MAY CAUSE UNIT TO FADE OVER TIME). FIX UNIT DIRECT TO STUD WITH ONLY PLASTER OR CEMENT SHEET BETWEEN. DO NOT FIX TO TILES. ENSURE TOP AND BOTTOM FIXING TO EACH STUD. MINIMUM FIXING OF 2 STUDS FOR FIRST 600MM. FIX TO EVERY STUD AFTER 600MM AT MINIMUM OF 450MM CENTERS. CREATE ADDITIONAL SUPPORT IF EXISTING WALL CANNOT ACHIEVE REQUIRED SUPPORT. ENSURE WALL IS PLUMB, STRAIGHT AND LEVEL. ENSURE WASTE PIPE IS LOCATED BETWEEN THE CUT-OUT PROVISION. INSTALLER IS RESPONSIBLE FOR CORRECT INSTALLATION AND DRAWER FACE ALIGNMENT.

### WARRANTY:

7 YEARS MANUFACTURERS WARRANTY  
 WARRANTY INCLUDES REPLACEMENT OF FAILED HARDWARE OR DEFECTIVE JOINERY  
 FAIR WEAR AND TEAR EXCLUDED  
 WATER DAMAGE EXCLUDED  
 DAMAGE/FAILURE DUE TO INCORRECT INSTALLATION OR INCORRECT USE OF PRODUCT EXCLUDED